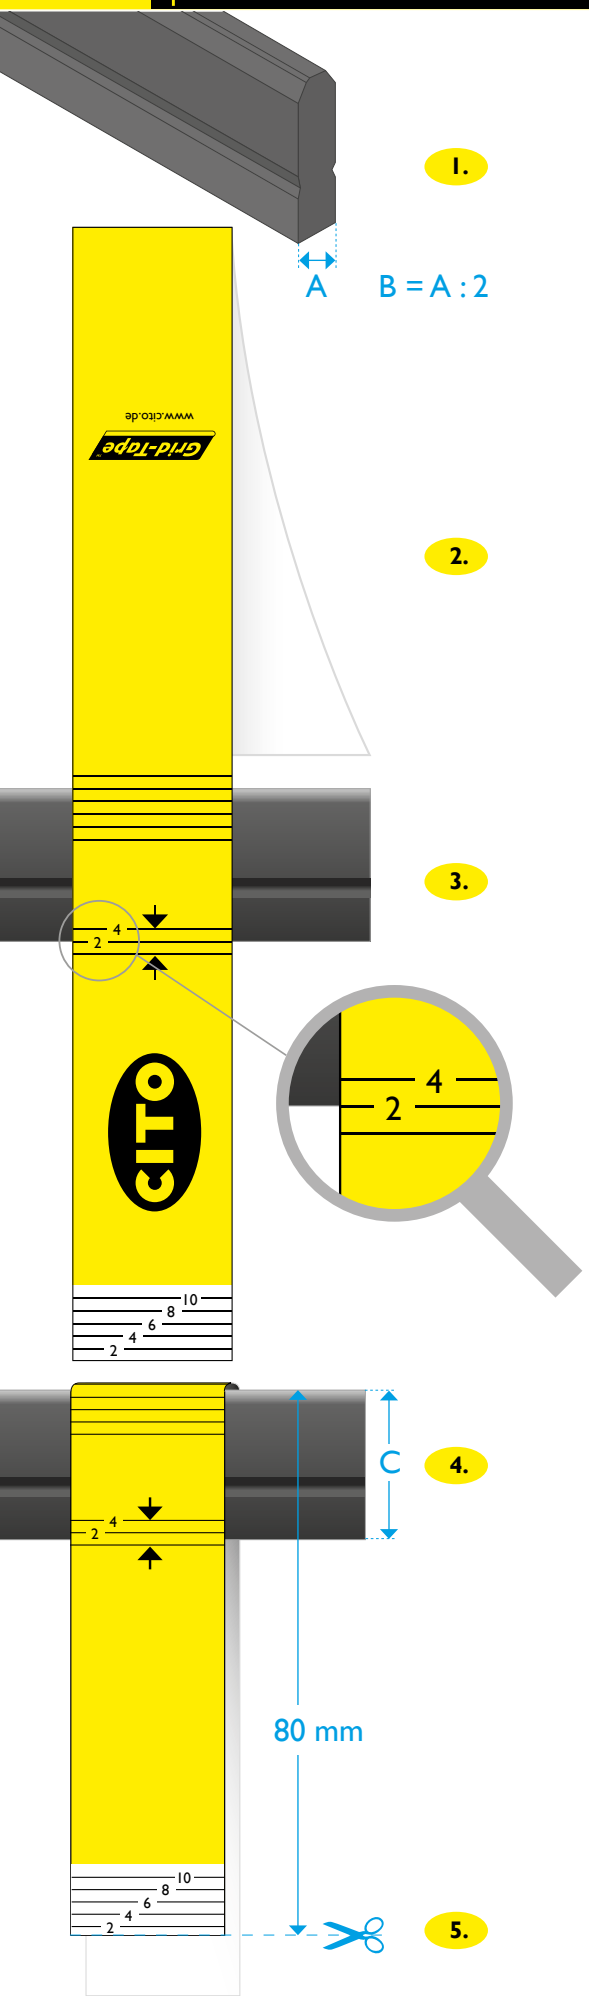

DE Montageanleitung

1. Messen Sie die Dicke der Metallschiene [A] und teilen Sie das Ergebnis durch 2; verwenden Sie den Wert dann bei Punkt 3.
2. Ziehen Sie die Schutzfolie ab.
3. Positionieren Sie das Grid-Tape™ bündig mit der schwarzen Linie (mit 2 Pfeilen) parallel zur unteren Seite der Metallschiene. Wenn das bei Punkt 1 [B] ermittelte Ergebnis den Wert 2 hat, dann positionieren Sie auf 2.
4. Kleben Sie das Grid-Tape™ auf das Stahlgitter-Profil. Nutzen Sie die Gruppe schwarzer Hilfslinien als Referenz, um es gerade auszurichten.
5. Drücken Sie die beiden Enden des Grid-Tape™ mit den Klebeflächen zusammen und schneiden Sie das Grid-Tape™ in der richtigen Länge ab oder falten Sie es um. Benutzen Sie die schwarze Hilfslinie, um gerade und auf die richtige Länge zu schneiden. Die schwarzen Linien haben zueinander einen Abstand von 2,0 mm. Normalerweise sollte die Länge des Grid-Tape™ 80 mm betragen, gemessen von der Oberseite des Stahlrahmens.

EN Assembly Instructions

1. Measure the thickness of the metal grid material [A] and divide the result by 2; use this value in number 3.
2. Remove the protective sheet.
3. Align the Grid-Tape™ by centring one of the black lines (in-between the 2 arrows) on the underside of the metal grid material. If the value calculated in number 1 [B] is 2, then align with 2.
4. Paste the Grid-Tape™ to the metal grid profile. Use the group of black lines as reference to align the Grid-Tape™ completely straight.
5. Press both ends of the Grid-Tape™ against the plastic reinforcement inside the conductor and cut the Grid-Tape™ to the correct length or fold it over. Use the black lines as a reference to cut straight and to the right length. The black lines are approx. 2.0 mm or 0.078 inch apart. Normally, the length of the Grid-Tape™ should be 80 mm measured from the top of the metal grid profile.

Höhe Grid Profil [C] Grid profile height [C]	Schneiden Sie das Grid-Tape™ bei Cut Grid-Tape™ at
16 mm	0
18 mm	2
20 mm	4
22 mm	6
24 mm	8
26 mm	10

CITO-SYSTEM GmbH • Haimendorfer Str. 37+46 • 90571 Schwaig bei Nürnberg/Germany • Phone +49 911 95885-0 • info@cito.de • www.cito.de

NR. 180320-DE